



Jul 1st, 12:00 AM

Sensitivity of the INCA model to N process parameters and hydrological input

Katri Rankinen

A. Lepistö

Kirsti Granlund

Follow this and additional works at: <https://scholarsarchive.byu.edu/iemssconference>

Rankinen, Katri; Lepistö, A.; and Granlund, Kirsti, "Sensitivity of the INCA model to N process parameters and hydrological input" (2002). *International Congress on Environmental Modelling and Software*. 52.
<https://scholarsarchive.byu.edu/iemssconference/2002/all/52>

This Event is brought to you for free and open access by the Civil and Environmental Engineering at BYU ScholarsArchive. It has been accepted for inclusion in International Congress on Environmental Modelling and Software by an authorized administrator of BYU ScholarsArchive. For more information, please contact scholarsarchive@byu.edu, ellen_amatangelo@byu.edu.

Sensitivity of the INCA model to N process parameters and hydrological input

K. Rankinen, A. Lepistö and K. Granlund

Finnish Environment Institute, P.O.Box 140, FIN-00251 Helsinki, Finland (katri.rankinen@ymparisto.fi)

Abstract: The Integrated Nitrogen in CAatchments (INCA) model simulates nitrogen transport and processes within catchments. It was applied to the Simojoki river basin in northern Finland where major human impacts are forest management and atmospheric nitrogen deposition. In this work the main emphasis is to evaluate the sensitivity of the INCA model to hydrological input. Parameters defining vegetation nitrogen uptake and denitrification rate were also studied. A simple univariate parametric (one-at-a-time) sensitivity analysis was conducted for NO₃-N leaching, NH₄-N leaching and denitrification in forest cut areas. Mineral nitrogen leaching was mainly influenced by hydrologically effective rainfall (HER). The parameter that controls denitrification rate had more influence than hydrological input parameters on the total amount of N that has been denitrified. There were only minor differences in parameter ranking between land use classes studied.

Keywords: Dynamic modelling; N processes; Sensitivity analysis; Relative sensitivity

1. INTRODUCTION

The Integrated Nitrogen in CAatchments (INCA) model [Wade et al. 2002] was applied to the Simojoki river basin (3160 km²) in northern Finland where major human impacts are forest management and atmospheric nitrogen (N) deposition. The INCA model is a semi-distributed, dynamic nitrogen model which simulates nitrogen transport and processes in six land use classes within catchments. Sources of nitrogen can be from atmospheric deposition, from the terrestrial environment or from direct discharges. Hydrologically effective rainfall (HER) is used to drive the nitrogen fluxes through the catchment system. In this application HER was derived from the results of the Watershed Simulation and Forecast System (WSFS), which simulates hydrology either on a sub-basin or on a river basin scale [Vehviläinen 1994].

Forest management can affect many aspects of river basin hydrology and nitrogen dynamics. Total runoff generally increases with forest disturbance as a result of reduced interception and transpiration. Nitrogen is considered to be the growth-limiting factor in most terrestrial ecosystems and natural ecosystems are characterized by a tight internal cycling of N.

Leaching losses and gaseous losses are generally less than a few kg N ha⁻¹ [Gundersen and Bashkin, 1994]. High leaching losses may occur after clear cutting due to enhanced mineralization and nitrification, and reduced N uptake of vegetation [Seuna, 1988]. Lowering of the water table by forestry ditching may also increase gaseous losses from nutrient rich peatland although it has a minor effect on poor peatlands [Martikainen et al. 1993].

Sensitivity analysis is primarily concerned with the question of how model outputs are affected by the variability of the model parameters and input values. It gives useful information when these components are incompletely known or if they are subject to changes or misspecifications. Sensitivity analysis provides the modeller with a list of parameters classified according to their influence on the model results. The analysis helps to identify which parameters have the most significant impact on the results. There are several different ways to conduct sensitivity analysis [Hamby, 1994].

In this work the main emphasis is to evaluate the sensitivity of the mineral N leaching and denitrification to the hydrological input. One reason for the study is to find out if hydrological input was described in enough detail this kind of modelling procedure. Also vegetation N uptake is

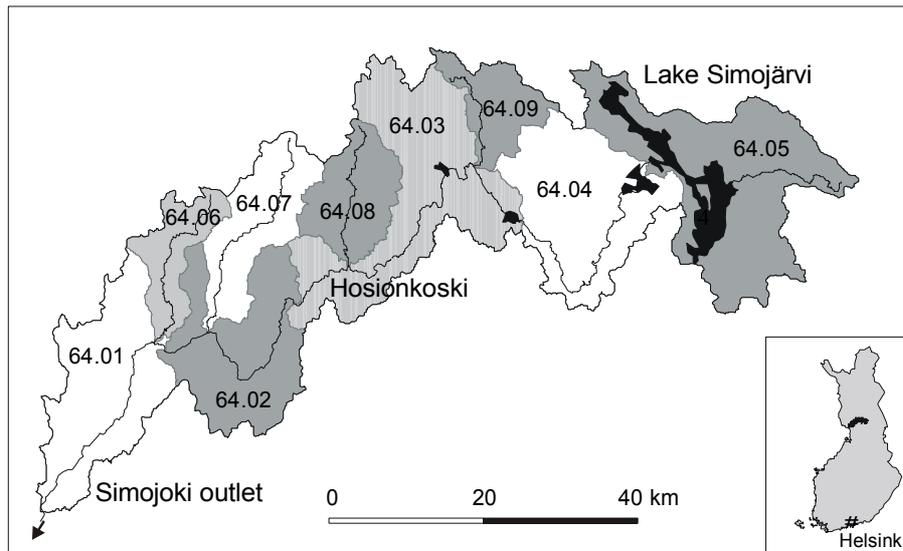


Figure 1. Location of river Simojoki basin (sub-basins 64.01-64.09) in the northern Finland

of interest, because the number of the land-use classes is restricted and thus the age-distribution of the vegetation cannot be taken into account. A simple univariate parametric (one-at-a-time) sensitivity analysis is conducted for the INCA model. The model outputs studied are $\text{NO}_3\text{-N}$ and $\text{NH}_4\text{-N}$ leaching and the total amount of N denitrified.

2. MATERIAL AND METHODS

2.1 INCA model

On the basis of earlier work by [Whitehead et al. 1998], a new version of the INCA model has now been developed. The structure of the new version differs from the original, in which soil-water retention volumes have been added and the process equations are now written in terms of loads rather than concentrations [Wade et al. 2002]. The INCA model is a semi-distributed, deterministic, dynamic nitrogen model which simulates and predicts nitrogen transport and processes within catchments. Sources of nitrogen can be from atmospheric deposition, from the terrestrial environment or from direct discharges. The model can simulate N processes in six land use classes simultaneously. There are three components included; the hydrological model, the catchment N process model and the river N process model.

Hydrologically effective rainfall (HER) is used to drive the nitrogen fluxes through the catchment system. In this application HER is derived from the

results of the Watershed Simulation and Forecast System (WSFS) [Vehviläinen, 1994]. The basic component of WSFS is a conceptual hydrological model which simulates runoff either on sub-basin or on river basin scale using precipitation, potential evaporation and temperature as inputs. WSFS takes into account soil frost and snow melt processes, which dominate river discharge in winter and early spring. Spatially uniform, lumped input data are calculated for the whole river basin and spatially semi-distributed input data are calculated for each of the nine sub-basins. Rankinen et al. [2000] showed that when comparing discharges simulated by the INCA model with observed values, a better fit was obtained with the semi-distributed hydrological input data (sub-basin scale) than the spatially uniform one (river basin scale). The timing of flow peaks was simulated quite well with both approaches, although the semi-distributed input data gave a more reasonable simulation of low flow periods and the magnitude of spring flow peaks.

INCA models plant uptake of $\text{NH}_4\text{-N}$ and $\text{NO}_3\text{-N}$, nitrification, denitrification, mineralisation and immobilisation within each sub-catchment. It uses a generalised set of equations with parameter sets specifically derived for the six different land use classes. By modifying these parameters N fluxes from each of the transformations for a given land use can be calibrated against experimental and field data available in the literature. Microbial N transformations are temperature and moisture dependent. Soil Moisture Deficit (SMD) and HER are given as inputs.

2.2 Area description

The river Simojoki discharges into the Gulf of Bothnia in the Baltic Sea. The river basin (3160 km²) is composed of nine sub-basins (Figure 1) [Ekholm, 1993]. Over the period 1961-1975, annual precipitation was 650-750 mm, mean annual evapotranspiration about 330 mm and annual runoff 350-450. There are about 170-180 winter days and the mean annual temperature is +0.5 - +1.5 °C. The duration of the snow cover is from the middle of November to May. The river Simojoki freezes at the end of October or at the beginning of November and the ice cover usually breaks up in the middle of May.

The river Simojoki is a salmon river in near-natural state, and the dominant human impact is forestry, mainly forest drainage and cutting. Peatlands and peatland forests are common in the region and an average of 0.5% of the total catchment area is felled annually. Forestry drainage was most intensive during the 1960s and 1970s, and by 1991 over 30% i.e. 1000 km² of the total catchment area had been drained. Urban areas cover only 0.06% and agricultural fields 2.7% of the catchment [Perkkiö et al. 1995]. In this application the six land-use classes are: forest on mineral soil, cut forest on mineral soil, forest on organic soil, cut forest on organic soil, agriculture and open surface water. Land use classes are derived from the satellite image based land use and forest classification of Finland [Vuorela, 1997], in which the different soil types are based on soil maps. In parameterization of the forest cut areas final cuttings were assumed, as well as forestry ditching on organic soils.

2.3 Sensitivity analysis

One-at-a-time sensitivity analysis is one of the simplest ways of investigating the sensitivity of a model [Hamby, 1994]. It consists in varying one parameter at a time while holding the others fixed.

In the current study the method of relative sensitivity is used. The sensitivity of the model is assessed via an index representing the influence of the change of a particular parameter as compared to the base-scenario, in which all the parameters has nominal values. Dubus et al. [1999] and Dubus [2002] presented the procedure of the Maximum Absolute Ratio of Variation (MAROV). Relative sensitivity for each model input parameter was calculated as follows:

$$MAROV = MAX \left| \frac{(O - O_{BC})}{(I - I_{BC})} \times \frac{I_{BC}}{O_{BC}} \right| \quad (1)$$

where O is the output value, O_{BC} is the output value for the base-case scenario, I is the input value, and I_{BC} is the original input value for the base-case scenario. The larger the index, the more influence a parameter has. A MAROV of unity means that a variation in the model input by $x\%$ will result at most in the same variation ($x\%$) in the model output.

Sensitivity analysis was conducted for HER, SMD and parameters defining vegetation N uptake (NO₃ uptake rate, NH₄ uptake rate and maximum uptake) and denitrification (denitrification rate). Atmospheric deposition was left out of this study, because it is typically very low in northern Finland. Studied outputs were NO₃-N leaching, NH₄-N leaching and denitrification. Studied land-use classes were forest cut areas on mineral soil and on organic soil. Total amount of vegetation N uptake and total amount of N denitrified were calibrated to values found in the literature [Mälkönen, 1974, Martikainen et al. 1993, Martikainen et al. 1994, Regina et al. 1996, Nieminen, 1998, Paavilainen and Smolander 1998, Smolander et al. 1998]. Ranges of parameters were based on expert judgement, and spatial field variability and possible measurement errors reported in the literature. The range of HER and SMD were based on the variation between different sub-catchments [Rankinen et al. 2002] and on the effects of forestry measures reported in the literature [Seuna, 1988, Alatalo, 2000]. The base-case scenario was run by using the lumped hydrological input of the year 1996. This year corresponded well with the long-term average flow and, in particular, the volume and timing of the spring flood was in good agreement with observations.

3. RESULTS AND DISCUSSION

Relative sensitivity was <1 for all parameters considered (Figure 2), which means that a variation of a parameter by 10% would affect the results by less than 10%. Results related to NO₃-N leaching were far less sensitive to changes in vegetation uptake parameters or denitrification rate constant than to changes in HER. NH₄-N leaching was mainly affected by HER. Total amount of N denitrified was mostly affected by denitrification rate constant, but partially by SMD and NO₃-N uptake rate constant. There were only minor differences in parameter ranking between land use classes studied.

The information of the ranking of parameters can be used to identify those parameters whose values require the most resources for their determination.

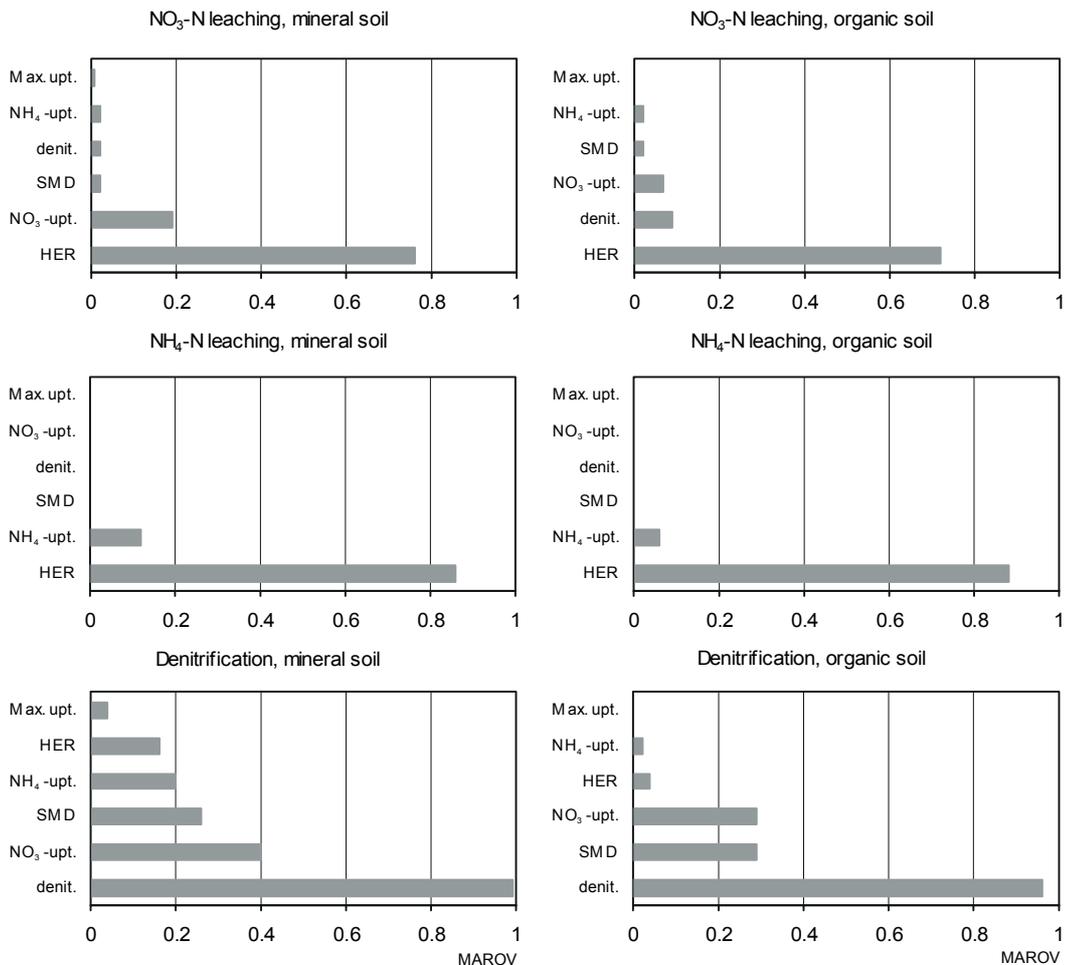


Figure 2. Ranking of the parameters on the mineral N leaching and denitrification of the INCA model according to MAROV values. In the figure symbol Max. upt. stands for maximum vegetation N uptake, NO₃-upt. for vegetation NO₃-N uptake rate, NH₄-upt. for vegetation NH₄-N uptake rate, denit. for denitrification rate, HER for hydrologically effective rainfall and SMD for soil moisture deficit.

This information also helps decide in which applications it is sufficient to use lumped hydrological input and in which applications the more laborious semi-distributed hydrological input is needed. The results were realistic, and the structure of the INCA model and the modelling procedure seems to be correct.

The MAROV indicator is relevant for classification purposes, even though it does not take into account the mutual correlations of different parameters. The advantages of this method are that it is easy to conduct and the results are easy to interpret. The method is suitable for detecting 'insensitive' parameters to be excluded from the subsequent calibration. In post-calibration studies where it is preferable to know whether the obtained parameter estimates are sufficiently accurate for the model to yield reliable predictions, correlations between variables should be considered [Elston, 1992,

Janssen, 1994]. This work should be seen as a first approach to studying the sensitivity of the INCA model and it will be followed by a deeper study, in which more parameters will be included and the mutual correlations of different parameters will be taken into account.

4. ACKNOWLEDGEMENTS

This study was supported by the Commission of the European Union, the INCA project (EVK1-CT-1999-00011). The authors would like to thank Dr. Bertel Vehviläinen for providing WSFS model simulations, Hannu Sirviö for commenting on the sensitivity analysis and Maria Holmberg for commenting on the manuscript.

5. REFERENCES

- Alatalo, M. Metsätaloustoimenpiteistä aiheutunut ravinne- ja kiintoainekuormitus. (The effects of forest management on the loading of nutrient and suspended solids, in Finnish). Finnish Environment 381, Finnish Environment Institute, Helsinki, 2000.
- Dubus, I. G., C. D. Brown and S. Beulke, Sensitivity analysis for the FOCUS leaching models. Proceedings of the 1999 Brighton Conference, Weeds, 15-18 November 1999, Brighton, UK, 2, 543-548, 1999.
- Dubus, I. G. and C. D. Bowen, Sensitivity and First-Step Uncertainty Analyses for the Preferential Flow Model MACRO, *Journal of Environmental Quality*, 31, 227-240, 2002.
- Ekholm, M., Suomen vesistöalueet. Vesi- ja ympäristöhallinnon julkaisuja - sarja A 126, 1993.
- Elston, D. A., Sensitivity analysis in the presence of correlated parameter estimates. *Ecological Modelling* 64, 11-22, 1992
- Gundersen, P. and V. N. Bashkin, Nitrogen Cycling. In: Moldan, B. and J. Cerny, (Eds.) Biogeochemistry of small catchments, Chichester, John Wiley & Sons Ltd, 255-283, 1994.
- Hamby, D. M., A review of techniques for parameter sensitivity analysis of environmental models, *Environmental Monitoring and Assessment* 32, 135-154, 1994.
- Janssen, P. H. M., Assessing sensitivities and uncertainties in models: a critical evaluation. In: J. Grasman and G. van Straten (Eds.) Predictability and Nonlinear Modelling in Natural Sciences and Economics, Kluwer Academic, Dordrecht., 344-361, 1994.
- Martikainen, P. J., H. Nykänen, P. Crill and J. Silvola, Effect of a lowered water table on nitrous oxide fluxes from northern peatlands, *Nature*, 366, 51-53, 1993.
- Martikainen, P. J., H. Nykänen, J. Silvola, J. Alm, K. Lång, A. Smolander and A. Ferm, Nitrous oxide (N₂O) emissions from some natural environments in Finland. 6th International Workshop on Nitrous Oxide Emissions, Turku, Finland, 1994.
- Mälkönen, E., Annual primary production and nutrient cycle in some Scots pine stands, Ph.D. Thesis, Department of Soil Science, Helsinki, Finnish Forest Research Institute, 87, 1974.
- Nieminen, M., Changes in nitrogen cycling following the clearcutting of drained peatland forests in southern Finland, *Boreal Environment Research*, 3, 9-21, 1998.
- Paavilainen, L. and A. Smolander, Nitrification and denitrification in soil from a clear-cut Norway spruce (*Picea abies*) stand, *Soil Biology and Biochemistry*, 30(6), 775-781, 1998.
- Perkkiö, S., E. Huttula and M. Nenonen, Simojoen vesistön vesiensuojelusuunnitelma. Vesi- ja ympäristöhallinnon julkaisuja-sarja A 200, 1995.
- Rankinen, K., A. Lepistö and K. Granlund. Hydrological application of the INCA (Integrated Nitrogen in Catchments) model with varying spatial resolution and nitrogen dynamics in a northern river basin, *Hydrology and Earth System Sciences*, 2002, accepted.
- Regina, K., H. Nykänen, J. Silvola and P.J. Martikainen, Fluxes of nitrous oxide from peatland as affected by peatland type, water table level and nitrification capacity, *Biogeochemistry*, 35, 401-418, 1996.
- Seuna, P., Effects of clear-cutting and forestry drainage on runoff in Nurmes-study, Proceedings of the international symposium on the hydrology of wetlands in temperate and cold regions. Joensuu, Finland 6-8 June 1988. Helsinki. Suomen Akatemia, Suomen Akatemian julkaisuja 1 (4), 122-134, 1988.
- Smolander, A., M. Kukkola and E. Mälkönen, Metsäekosysteemin toiminta typpikuormituksen alaisena. E. Mälkönen (Ed.), Ympäristönmuutos ja metsien kunto. Metsien terveydentilan tutkimusohjelman loppuraportti, Metsäntutkimuslaitos, 691, 175-181, 1998.
- Vehviläinen, B., The watershed simulation and forecasting system in the National Board of Water and the Environment. Publ. of the Water and Environment Research Institute No 17, 3-16, 1994.
- Wade, A.J., P. Durand, V. Beaujouan, W. Wessels, K. Raat, P.G. Whitehead, D. Butterfield, K. Rankinen and A. Lepistö, Towards a generic nitrogen model of European ecosystems: New model structure and equations, *Hydrology and Earth System Sciences*, 2002, accepted.
- Whitehead, P. G., E. J. Wilson and D. Butterfield, A semi-distributed Integrated Nitrogen model for multiple source assessment in Catchments (INCA): Part I-model structure and process equations, *The Science of the Total Environment*, 210/211, 547-558, 1998.
- Vuorela, A., Satellite image based land cover and forest classification of Finland, Reports of the Finnish Geodetic Institute 97, 42-52, 1997.